



PRESTCOM
Instal




CE
1783



01.12.2012



**COMPENSATOR AXIAL
DE DILATAȚIE LINIARĂ,
PN 16 DN 25-250**

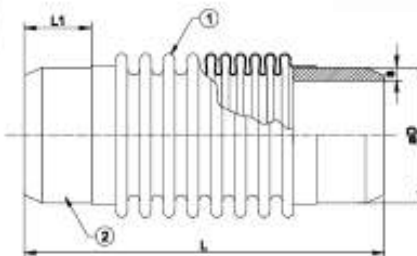

| MATERIALE | | |
|-----------|-----------------|--------------------|
| Nr. Crt. | Descriere | Material |
| 1 | Capete sudabile | Oțel carbon OL 37 |
| 2 | Corp | Oțel inox AISI 321 |

| | |
|--------|----------|
| DESIGN | TS 10880 |
| Teste | TS 10880 |

| COMPENSATOR AXIAL CU CAPETE PT. SUDARE | | | | | | | | | | | | |
|--|----|---------------------|------|------|------|------|------|-------|-------|-------|-------|-----|
| PN | 16 | | | | | | | | | | | |
| DN | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | 200 | 250 | |
| Dimensiuni | L | 120 | | | 260 | 280 | | | 300 | 350 | 390 | |
| | ΦD | 33,7 | 42,4 | 48,3 | 60,3 | 76,1 | 88,9 | 114,3 | 139,7 | 168,3 | 219,1 | 273 |
| | L2 | 40 | | | | 50 | | | | 60 | | 70 |
| | Δx | 30 mm (-20 /+10 mm) | | | | | | | | | | |
| | s | 2,6 | | | 2,9 | 3,2 | 3,6 | 4 | 4,5 | 5,6 | 8,3 | |

T-1950

| COMPENSATOR AXIAL CU CAPETE PT. SUDARE | | | | | | | | |
|--|----|---------------------|------|-------|-------|-------|-------|-----|
| PN | | | | | | | | |
| DN | 65 | 80 | 100 | 125 | 150 | 200 | 250 | |
| Dimensiuni | L | 260 | 280 | | | 300 | 350 | 390 |
| | ΦD | 76,1 | 88,9 | 114,3 | 139,7 | 168,3 | 219,1 | 273 |
| | L2 | 50 | | | | 60 | 70 | |
| | Δx | 60 mm (-40 /+20 mm) | | | | | | |
| | s | 2,9 | 3,2 | 3,6 | 4 | 4,5 | 5,6 | 8,3 |

T-1960

| APLICATII |
|--|
| * apă caldă/rece |
| * apă supraîncălzită |
| * abur de joasă presiune |
| * aer comprimat |
| * apă de mare |
| * fluide, exclusiv acizi sau inflamabile |

| RATING PRESIUNE TEMPERATURĂ | |
|--------------------------------|------------|
| °C | -80...+420 |
| PN | 16 |

* Valorile din tabele sunt informative și se pot modifica fără notificare prealabilă